




Floor trap, with 15x15 grating, vertical outlet

Code N° : SC504G – SC504S – SC504

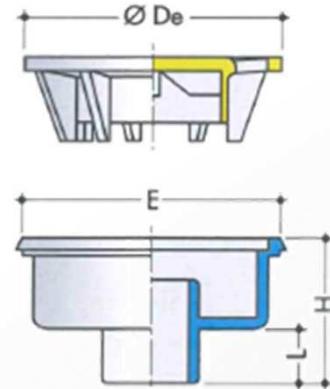

Ø De	E	L	H
139	150	32	88

■ FUNCTION :

- This floor drain is aimed at collecting discharge waters of loggias, terraces, courtyards, bathrooms, laundry rooms, garages, cellars, industry...

■ MATERIAL :

- Floor traps injected in rigid PVC (UV stable)
- The 150x150 mm removable grating is made of reinforced PVC
- Colors : light grey (SC504G), sand (SC504S), or dark grey (SC504).

■ DESCRIPTION :

- Water seal height : 17 mm
- Flow rate: 0,94 litre/second with D40 socket outlet
0,55 litre/second with D50 spigot outlet
- Resistance : 800 kg
- Outlet : Spigot D50mm
- The half ball is linked to the grating

■ IMPLEMENTATION :

- In case of sealing in concrete, make sure that the gully body is well positioned and in full contact with the concrete.
- D50 mm outlet : push-fit or solvent-welding connection
- D40 mm outlet : solvent-welding connection

■ QUALITY - ENVIRONMENT :

ISO 9001
ISO 14001
ISO 50001
BUREAU VERITAS
Certification



DATE .JULY.2016...